

	Cummins Inc. Columbus, Indiana 47201	Basic Engine Model: QST30-G8	Curve Number: FR-5150	<i>G-DRIVE</i> Q30 1
	ENGINE PERFORMANCE CURVE	Engine Critical Parts List: CPL: 2366	Date: 12Jun02	
Displacement : 30.48 litre (1860 in ³)		Bore : 140 mm (5.51 in.) Stroke : 165 mm (6.50 in.)		
No. of Cylinders : 12		Aspiration : Turbocharged and Aftercooled		

•• PRELIMINARY ••

Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kWm	BHP	kWm	BHP	kWm	BHP
1500	895	1200	806	1080	686	920

Engine Emissions


Prime rated engine complies with the following TA-Luft emissions limits :

NO_x : 2000 mg/nm³
CO : 650 mg/nm³

NMHC : 150 mg/nm³
Particulates : 130 mg/nm³

Engine Performance Data @ 1500 RPM

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	BHP	kg/ kWm·h	lb/ BHP·h	litre/ hour	U.S. Gal/ hour
STANDBY POWER						
100	895	1200	0.217	0.356	228	60.2
PRIME POWER						
100	806	1080	0.211	0.347	200	52.8
75	604	810	0.208	0.342	148	39.0
50	403	540	0.213	0.350	101	26.6
25	201	270	0.243	0.399	57	15.2
CONTINUOUS POWER						
100	686	920	0.209	0.343	168	44.4

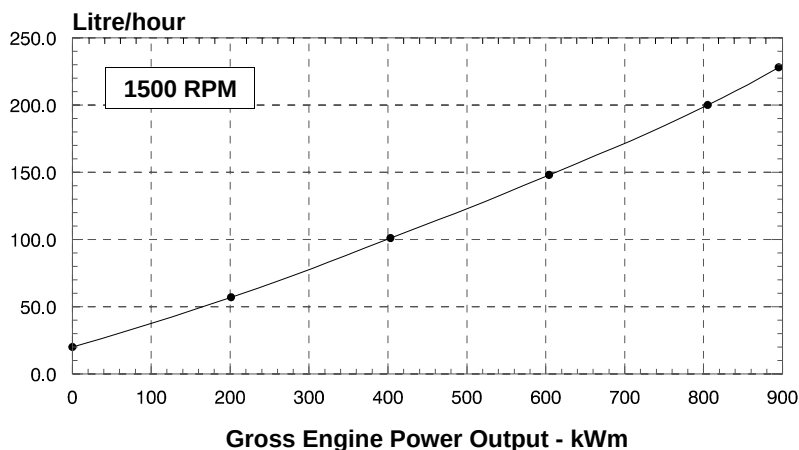

Engine for use at 1500 RPM operation only.

CONVERSIONS: (Litres = U.S. Gal x 3.785) (kWm = BHP x 0.746) (U.S. Gal = Litres x 0.2642) (BHP = kWm x 1.34)

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. For TA-Luft emissions compliance, fuel specification must meet ASTM D975 No. 2-D diesel fuel with a maximum 0.2% sulfur content (by weight) and have a minimum 45 cetane number.

See reverse side for application rating guidelines.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lb/U.S. gal).

Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

Engine must be applied to Cummins application guidelines and installation recommendations relevant to the product.

D.K. Trueblood

TECHNICAL DATA DEPT.

CERTIFIED WITHIN 5%

CHIEF ENGINEER

POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

STANDBY POWER RATING is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

CONTINUOUS POWER RATING is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PRIME POWER RATING is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

Reference Standards:

BS-5514 and DIN-6271 standards are based on ISO-3046.

Operation At Elevated Temperature And Altitude:

The engine may be operated at:

1500 RPM up to 1000 m (3280 ft) and 40 °C (104 °F) without power deration.

For sustained operation above these conditions, derate by 5% per 300 m (1000 ft), and 4% per 5 °C (3% per 5 °F).

ENGINE MODEL : QST30-G8

CONFIGURATION NUMBER : D573001GX03

DATA SHEET : DS-5150

DATE : 12Jun02

PERFORMANCE CURVE : FR-5150

INSTALLATION DIAGRAM

• Fan to Flywheel : 3170286

CPL NUMBER

• Engine Critical Parts List : 2366

GENERAL ENGINE DATA

Type.....	4-Cycle; 50° Vee; 12-Cylinder Diesel
Aspiration	Turbocharged and Aftercooled
Bore x Stroke	140 x 165 (5.51 x 6.50)
Displacement	30.48 (1860)
Compression Ratio.....	15.7 : 1
Dry Weight	
Fan to Flywheel Engine..... — kg (lb)	3012 (6640)
Wet Weight	
Fan to Flywheel Engine..... — kg (lb)	3112 (6860)
Moment of Inertia of Rotating Components	
• with FW 5050 Flywheel	— kg • m ² (lb _m • ft ²) 8.7 (206)
Center of Gravity from Rear Face of Flywheel Housing (FH 5031)	— mm (in) 845 (33.3)
Center of Gravity Above Crankshaft Centerline	— mm (in) 195 (7.7)
Maximum Static Loading at Rear Main Bearing.....	— kg (lb) 950 (2100)

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block	— N • m (lb • ft)	3100 (2286)
--	-------------------	-------------

EXHAUST SYSTEM

Maximum Back Pressure.....	— mm Hg (in Hg)	51 (2)
----------------------------	-----------------	--------

AIR INDUCTION SYSTEM

Maximum Intake Air Restriction		
• with Dirty Filter Element	— mm H ₂ O (in H ₂ O)	508 (20)
• with Normal Duty Air Cleaner and Clean Filter Element.....	— mm H ₂ O (in H ₂ O)	254 (10)
• with Heavy Duty Air Cleaner and Clean Filter Element	— mm H ₂ O (in H ₂ O)	381 (15)

COOLING SYSTEM (Separate Circuit Aftercooling Required)

Coolant Capacity — Engine Only	— litre (US gal)	87 (23)
Minimum Pressure Cap (For Cooling Systems with less than 6 ft. [2 m] Static Head)	— kPa (psi)	69 (10)
Maximum Top Tank Temperature for Standby / Prime Power.....	— °C (°F)	104 / 100 (220 / 212)

Jacket Water Circuit Requirements:

Maximum Coolant Friction Head External to Engine — 1500 rpm.....	— kPa (psi)	48 (7)
Maximum Static Head of Coolant Above Engine Crank Centerline.....	— m (ft)	14 (46)
Standard Thermostat (Modulating) Range	— °C (°F)	82 - 95 (180 - 203)

Aftercooler Circuit Requirements:

Pump Flow	— litre / sec (US gpm)	3.8 - 5.0 (60 - 80)
Maximum Coolant Temperature to Aftercooler at Standby Power.....	— °C (°F)	46 (114)
Minimum Coolant Temperature to Aftercooler at Prime Power.....	— °C (°F)	38 (100)
Maximum Coolant Friction Head External to Engine — 1500 rpm.....	— kPa (psi)	35 (5)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed	— kPa (psi)	166 (24)
@ Governed Speed.....	— kPa (psi)	310 - 386 (45 - 56)
Maximum Oil Temperature	— °C (°F)	121 (250)
Oil Capacity with OP 5133 Oil Pan : High - Low.....	— litre (US gal)	133 - 114 (35 - 30)
Total System Capacity (Including Bypass Filter)	— litre (US gal)	154 (40.7)

FUEL SYSTEM

Type Injection System.....	Bosch P8500 Direct Injection	
Maximum Restriction at Lift Pump — with Clean Fuel Filter.....	— mm Hg (in Hg)	102 (4.0)
— with Dirty Fuel Filter	— mm Hg (in Hg)	203 (8.0)
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)....	— mm Hg (in Hg)	508 (20)
Maximum Fuel Flow to Injection Pumps (Left Bank and Right Bank combined) — 1500 RPM	— litre / hr (US gph)	550 (145)
Maximum Fuel Inlet Temperature.....	— °C (°F)	71 (150)
Maximum Drain Flow.....	— litre / hr (US gph)	530 (140)

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement).....	— volt	24
Battery Charging System, Negative Ground.....	— ampere	35
Maximum Allowable Resistance of Cranking Circuit.....	— ohm	0.002
Minimum Recommended Battery Capacity		
• Cold Soak @ 10 °C (50 °F) and Above.....	— 0°F CCA	1280
• Cold Soak @ 0 °C to 10 °C (32 °F to 50 °F).....	— 0°F CCA	1280
• Cold Soak @ -18 °C to 0 °C (0 °F to 32 °F).....	— 0°F CCA	1800

COLD START CAPABILITY

Minimum Ambient Temperature for Aided (with Coolant Heater) Cold Start within 10 seconds.....	— °C (°F)	10	(50)
Minimum Ambient Temperature for Aided (with Grid Heater) Cold Start.....	— °C (°F)	0	(32)
Minimum Ambient Temperature for Unaided Cold Start.....	— °C (°F)	7	(45)

PERFORMANCE DATA

All data is based on:		• Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.	
		• Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.	
		• ISO 3046, Part 1, Standard Reference Conditions of:	
Barometric Pressure	: 100 kPa (29.53 in Hg)	Air Temperature	: 25 °C (77 °F)
Altitude	: 110 m (361 ft)	Relative Humidity	: 30%
Air Intake Restriction	: 254 mm H ₂ O (10 in H ₂ O)	Exhaust Restriction	: 51 mm Hg (2 in Hg)

Steady State Stability Band at any Constant Load — % +/- 0.25

Estimated Free Field Sound Pressure Level of a Typical Generator Set;

Excludes Exhaust Noise; at Rated Load and 7.5 m (24.6 ft); @1500 rpm..... — dBA 95.5 (est.)

Exhaust Noise at 1 m Horizontally from Centerline of Exhaust Pipe Outlet Upwards at 45°..... — dBA 119.5 (est.)

Governed Engine Speed.....	— rpm
Engine Idle Speed.....	— rpm
Gross Engine Power Output.....	— kW _m (BHP)
Brake Mean Effective Pressure.....	— kPa (psi)
Piston Speed.....	— m / s (ft / min)
Friction Horsepower.....	— kW _m (HP)
Engine Jacket Water Flow at Stated Friction Head External to Engine:	
• 4 psi Friction Head.....	— litre / s (US gpm)
• Maximum Friction Head.....	— litre / s (US gpm)

Engine Data with Dry Type Exhaust Manifold

Intake Air Flow.....	— litre / s (cfm)
Exhaust Gas Temperature.....	— °C (°F)
Exhaust Gas Flow.....	— litre / s (cfm)
Air to Fuel Ratio.....	— air : fuel
Radiated Heat to Ambient.....	— kW _m (BTU / min)
Heat Rejection to Coolant.....	— kW _m (BTU / min)
Heat Rejection to Exhaust.....	— kW _m (BTU / min)

Engine Aftercooler Data

Turbocharger Compressor Outlet Temperature.....	— °C (°F)
Heat Rejection to Coolant.....	— kW _m (BTU / min)
Aftercooler Water Flow at Stated Friction Head External to Engine:	
• 2 psi Friction Head.....	— litre / s (US gpm)
• Maximum Friction Head.....	— litre / s (US gpm)

STANDBY POWER		PRIME POWER	
60 hz	50 hz	60 hz	50 hz
Not Applicable for 1800 RPM Operation	1500	Not Applicable for 1800 RPM Operation	1500
	700 - 900		700 - 900
	895 (1200)		805 (1080)
	2344 (340)		2110 (306)
	8.3 (1634)		8.3 (1634)
	58 (78)		58 (78)
	12.5 (198)		12.5 (198)
	12 (190)		12 (190)
	1197 (2540)		1128 (2390)
	509 (950)		472 (885)
	3212 (6805)		2880 (6102)
	25.7 : 1		27.6 : 1
	115 (6515)		100 (5715)
	330 (18755)		305 (17370)
	720 (40950)		606 (34450)
	208 (405)		189 (370)
	232 (13185)		193 (10970)
	4.5 (72)		4.5 (72)
	4.4 (68)		4.4 (68)

N.A. - Data is Not Available

N/A - Not Applicable to this Engine

TBD - To Be Determined

• • PRELIMINARY • •

ENGINE MODEL : **QST30-G8**

DATA SHEET : DS-5150

DATE : 12Jun02

CURVE NO. : FR-5150